


DMX Par 36 2L

Operating Instructions

BEFORE OPERATING THIS DEVICE, READ, UNDERSTAND, AND FOLLOW THESE INSTRUCTIONS. BE SURE TO SAVE THIS BOOKLET FOR FUTURE REFERENCE.

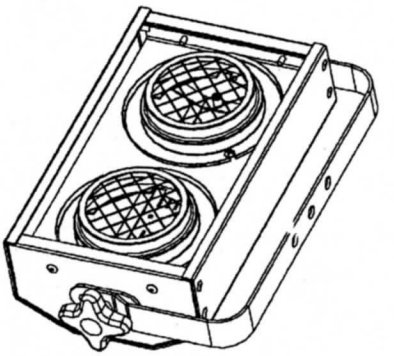

WARNING - This luminaire is intended for professional use only and does not comply with certain domestic lighting regulations.

IMPORTANT NOTES

- Minimum distance from a lighted object is 1 Meter.
- Maximum rated ambient temperature is 45°C.
- Input cable may be subjected to temperatures up to 180°C.
- Maximum rated voltage is 240V.
- Normal frequency is 50/60 H z.
- Maximum rated wattage is 650 Watts per lamp.

SAFETY NOTES

- Replace lamp if cracked or thermally deformed.
- The Spot Banks should not be used in explosive or inflammable environments.
- Always fit safety wire from luminaire to supporting framework.
- Do not over voltage luminaire.
- When connecting to the electrical supply, ensure that the luminaire is effectively earthed, that the supply is at the rated voltage for the lamp, wiring is complete and as shown on the diagram below and that the correct polarity is observed.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- Shields, lenses or ultraviolet screens shall be changed if they have become visibly damaged to such an extent that their effectiveness is impaired, for example by cracks or deep scratches.
- Always disconnect from the mains, when the device is not in user or before cleaning it.

ELECTRICAL CONNECTION

WARNING - This appliance **MUST** be earthed. The supply cables should be connected to an approved plug in accordance with following code:

Wire Colour	Connection	Plug Terminal Marking or Colour
Green & Yellow	Earth	E Green & Yellow or ⊕
Blue	Neutral	N Black
Brown	Live	L Red

LAMP REPLACEMENT

- 1) Disconnect the luminaire from the power supply and allow cooling.
- 2) Undo the 2 screws that hold each lamp-retaining ring that holds the Par lamp.
- 3) Remove wires from the lamp by unscrewing the screw terminals.
- 4) To refill lamp, follow steps 1 to 3 in reverse order.
- 5) Ensure the lamp is seated properly and make sure no wires are trapped before refixing.

MOUNTING AND ADJUSTMENT

WARNING-Max Temp=180°C - This luminaire is not suitable for mounting on flammable surfaces. The luminaire is supplied with a yoke with a 12.7mm diameter hole allowing the luminaire to be fitted with a hook clamps in order that it can be mounted on a 5cm tube. Using the "T" bar on the side, the tilt angle can be adjusted.

LAMP TYPES

Standard lamp types are shown in the box below.

Lamp Types for Par 36 Spot Bank	Voltage	Wattage
Type		
DWE PAR36	120V	650W

N.B. Always use bulbs of identical Voltage and Wattage in the same circuit.

Operating Instruction

You have three modes to operate this luminaire.

1. DMX Mode

DMX mode allow you link a serial unite into a chain with DMX linking cable-stereo cable with 3-pin XLR-plug and connector. Then you control them with a standard DMX. When you set the dip 10 to "OFF", they will step into DMX mode, this unit only have one channel. Dip 1-9 set the DMX address. You adjust the brightness of two lamps via DMX value. The brightness is increased when the DMX value is increasing.


2. Auto Mode

When you set the dip 9 to "off" and dip 10 to "on", adjust the speed of gradual change for lamp brightness via the dip 1-8. When you set all the dip 1-8 to "OFF", the speed of gradual change is the fastest. When you set all the dip 1-8 to "ON", the speed of gradual change is the lowest.

3. Manual Mode

When you set the dip 9, 10 to "ON", you can adjust the brightness of two lamps via setting the Dip 5-8.

When set all the dip 5-8 to "on", the brightness of two lamps is on Max value. When set all the dip 5-8 to "OFF", the two lamps will turn off. In this mode the Dip 1-4 are invalid.



DMX OUT DMX IN



DIP switches



DMX Address



Slow SPEED Fast



Dark Bright

Please retain this instruction leaflet for future reference.

Made in China



Ver:1.0.