


E-Shot Power shot Cartridge System

M79



Break Seal before Firing

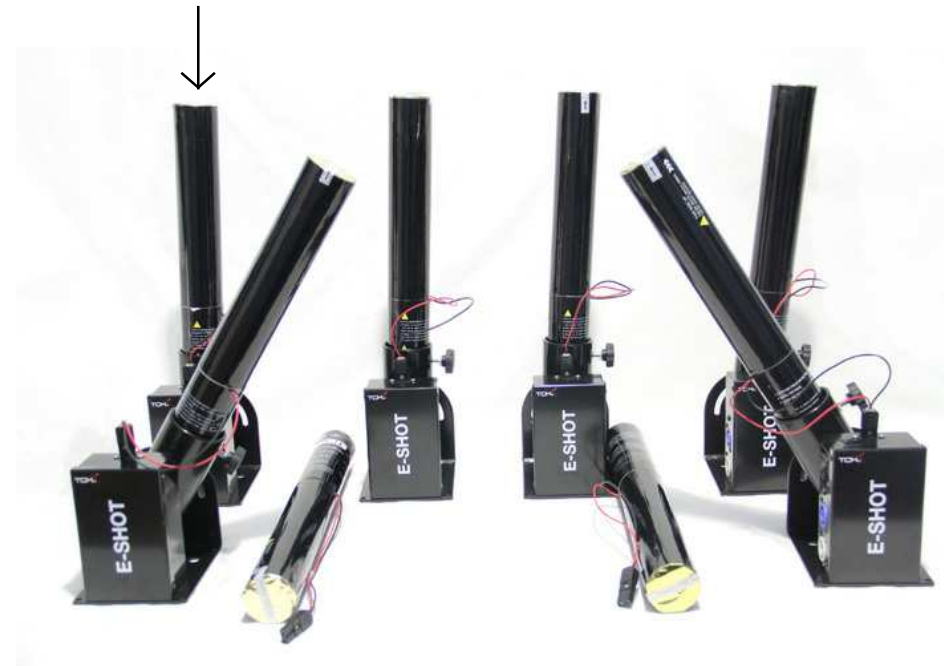

The E-shot Cartridge system consists of;

E-shot Holder

Lemaitre Air Cannon Detonator

Powercon Cable from Detonator to Holder
& the Confetti/Streamer Cartridge to be fired.

The system uses 240v to detonate the cartridge and is supplied via the Lemaitre detonator connected by Powercon cabling. Ensure that the Cable is connected to the items and is twist locked in place. (You will hear it click when connected securely)

Test the empty holder by turning on the Lemaitre Detonator via the Key switch & pressing fire button BEFORE LOADING THE EFFECT CARTRIDGE. You should see the blue test LED on the E-shot holder light up whilst the fire button is depressed confirming all is connected correctly.

Remove the Key from the detonator thus preventing accidental firing of the system and place the desired effect cartridge of Streamers or Confetti in the E-shot holder and secure with the thumb screw preventing the cartridge from working loose.

Break the seal at the end of the tube (opposite end from the cable) and plug into the socket on the E-shot Holder and you are ready to fire. Multiple E-shots may be daisy chained for simultaneous firing using Powercon cables or for individual separate detonation up to 4 can be controlled by wiring each back to the Detonator.

Please ensure the Detonator Key, Lanyard & Instruction sheet are returned at the end of your hire