Printed from: Serif PagePlus 19,0,2,22 Copyright © 1991-2015 Serif (Europe) Ltd. All Rights Reserved
Printed on: 31/10/2026 14:05:25
Publication name: EASY DMX 48 Instructions.ppp, Page: 1

VIKING
STAGE LIGHTING

VK EazyDMX48 Lighting Desk



DMX Control


The **VK48 EASYDMX48** is a 48-channel DMX desk which comes with 24 faders and 2 pages of Control selected by the **PAGE** button. When you push move the fader up or down, it will output the DMX signal and corresponding DMX channel & Value will be displayed.

The unit is linkable via DMX In/Out to have more channels. For example, the first VK48 EASYDMX48 gives out DMX address from 1-48, the second one from 49-96, the third one 97-144,and so on. In this case, you need to set DMX address for each controller.

Set DMX address

To set the start address for the **VK48 EasyDMX48** please refer to the setting of the dip switch on the Rear of the desk and table below

Dip Switch No	Address
1	1
2	2
3	4
4	8
5	16
6	32
7	64
8	128
9	256

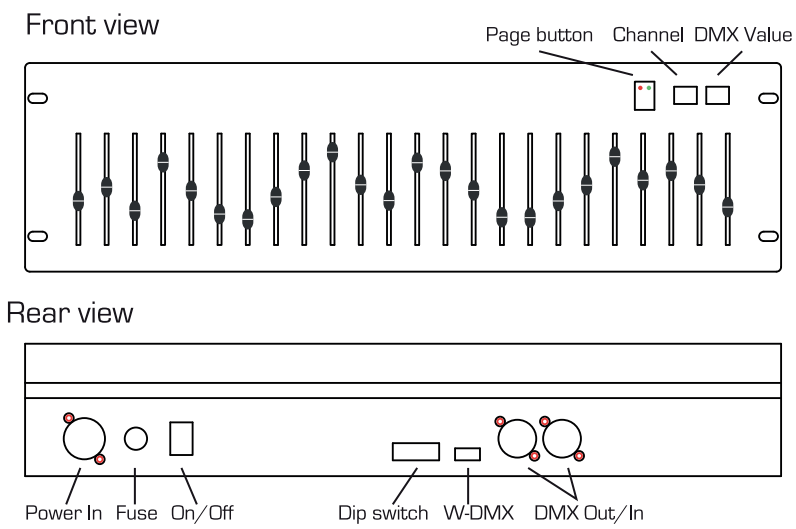

Printed from: Serif PagePlus 19,0,2,22 Copyright © 1991-2015 Serif (Europe) Ltd. All Rights Reserved
Printed on: 31/10/2026 14:05:25
Publication name: EASY DMX 48 Instructions.ppp, Page: 2

Features:

- 48ch DMX controller
- 24 sliders + 1 page button
- Linkable via DMX in/out
- Dip switch for addressing output channel
- LED display for channel & DMX value
- LTP support in DMX output
- Mains Power : AC 100-240v Auto Sensing
- Power consumption: 5W max.
- Fuse: F1A/250V
- Dimension: 482 x 133 x 85 mm
- Weight: 2.3kg

DMX Connection

Connect your **VK48 EASYDMX48** to a lighting fixture or the next **VK48 EASYDMX48** using 3 pin DMX or Microphone cable for DMX signal connection

Communication

