


VIKING

STAGE LIGHTING



VK512 Eazy DMX Lighting Desk

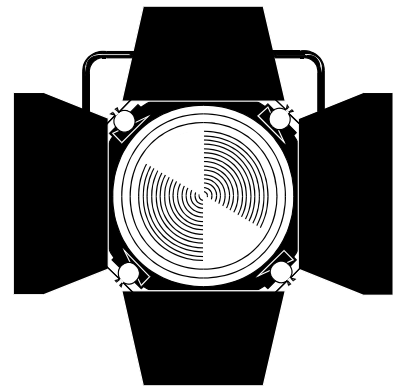

DMX Control

The **VK512 EASY DMX 48** is a 48-channel DMX desk which comes with 24 faders and 2 pages of Control selected by the **PAGE** button. When you push move the fader up or down, it will output the DMX signal and corresponding DMX channel & Value will be displayed.


The unit is linkable via DMX In/Out to have more channels. For example, the first EASY DMX 48 gives out DMX address from 1-48, the second one from 49-96, the third one 97-144, and so on. In this case, you need to set DMX address for each controller.

Set DMX address


To set the start address for the **VK512Easy DMX48** please refer to the setting of the dip switch on the Rear of the desk and table below

Dip Switch No	Address
1	1
2	2
3	4
4	8
5	16
6	32
7	64
8	128
9	256

Front view

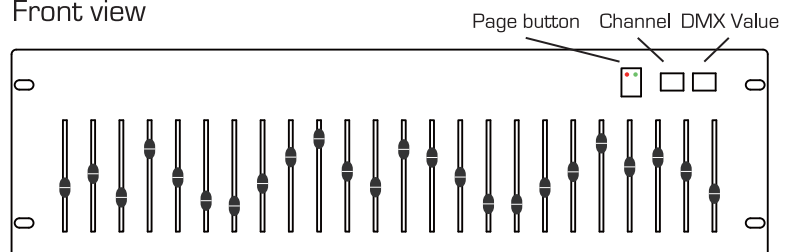

Rear view

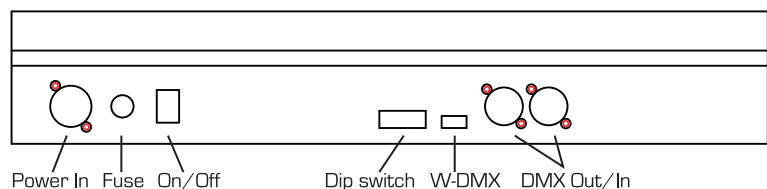

Features:

- 48ch DMX controller
- 24 sliders + 1 page button
- Linkable via DMX in/out
- Dip switch for addressing output channel
- USB for W-DMX Transceiver
- LED display for channel & DMX value
- LTP support in DMX output
- Mains Power : AC 100-240v Auto Sensing
- Power consumption: 5W max.
- Fuse: F1A/250V
- Dimension: 482 x 133 x 85 mm
- Weight: 2.3kg

DMX Connection

Connect your **VK512 EASY DMX 48** to a lighting fixture or the next **VK512 EASY DMX 48** using 3 pin DMX or Microphone cable or the optionally available **VK Mini WDMX Dongle** for wire free DMX Communication

