


# **VIKING**

## **STAGE LIGHTING**



### **VK36 Eazy36 DMX Lighting Desk**



#### **Features**

- 36 DMX Control Channels 1-36
- 12 Faders for Channel Control
- 3 Pages of Faders 1-12, 13-24, 25-36
- 1 Grand Master Dimmer fader
- Led Display of channel DMX value
- Led Display of channel No
- Power by PP3 (MN1604) Battery
- Or Powered by USB C Connector
- 8 Hours run time on MN1604
- Size: 340 x 140 x 65mm
- Weight 1.6kg

The **VK36 EASY36 DMX** is a 36-channel DMX desk which comes with 18 faders plus a Grand Master fader and 3 pages of memory allowing the control of up to 36 channels of DMX by selecting the appropriate page using the **PAGE** button. When you push move the fader up or down, it will output the DMX signal and corresponding DMX channel & Value will be displayed On the LED display with the appropriate page button LED lit


Please note that it is NOT possible to control more than DMX channels 1 to 36 - a larger desk is required if this is needed.

# Product Overview

Top view



Rear view

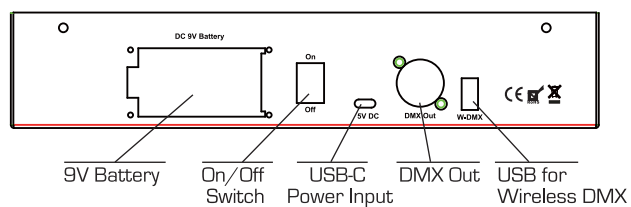

## Power Input

The unit is designed to work on a 5v DC power supply provided Through a standard USB C port or charger plug top. Use by 9v PPC / MN1604 Alkaline Battery will give approx 8 hours Continuous use.